


Production Introduce

1, Transparent EVA film for Architecture Glass lamination

EVA (Ethyl Vinyl Acetate) film is a type of hot melt adhesive interlayer film for safety glass lamination. There are both thermoset type for outdoor use and also thermoplastic type for indoor use. It was easy to operate compare with any other interlayers.

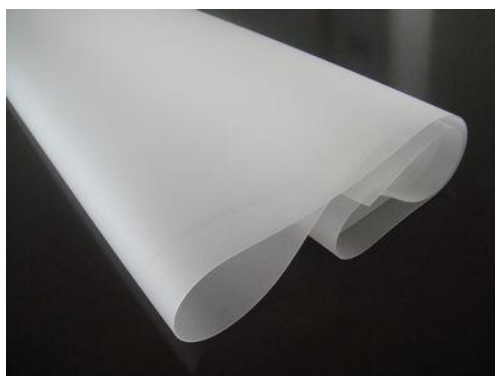

Technical Data

Item	Data
Melting Point	68 °C
Density	0.985 g/CM ³
Water Absorption	≅ 0.1 %
Light Transmittance	91.90%
Haze	0.20%
Tensile Strength	21 Mpa
Elongation at Break	542%
Cross Linking	85%
UV Block (200-385nm)	≅ 99 %
UV Resistance(290-385nm)	89.20%
Yellow Index(YI)	< 3.0
Dumping & Heat Resistance (85 °C , 85% RH)	88.60%
Boiling Test (2 hrs into 100°C water)	Qualified

2, White EVA film

White color EVA film can be used for glass partition wall, Shower room glass door and etc.
 The most popular color is milky white also called sandblast.



Jade White



Translucent White



Super White




Frosted White



Milky White



Dark White

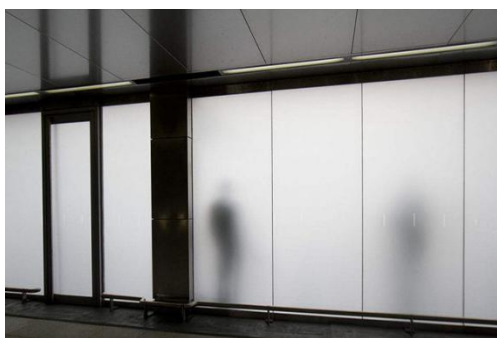

Technical Data

Product	Jade White	Milky white	Frosted white	Translucent white	Dark white	Super white
Transmittance %	46	28	12	5	0.8	0.3
Shodow Block %	53	78	86	92	96	98



3, Color EVA film

Color EVA film is mainly used for home decoration. We have colors in transparent, translucent and also opaque. More than 40 different colors are available.

Color EVA Transparent



Color EVA Opaque

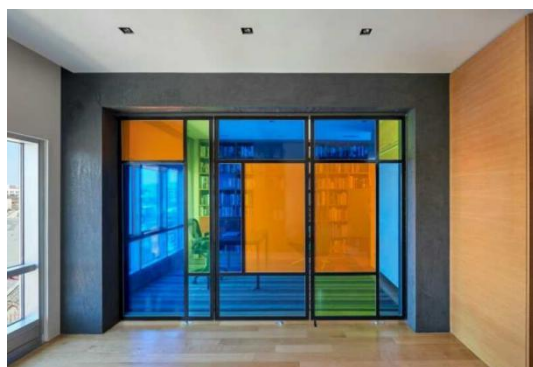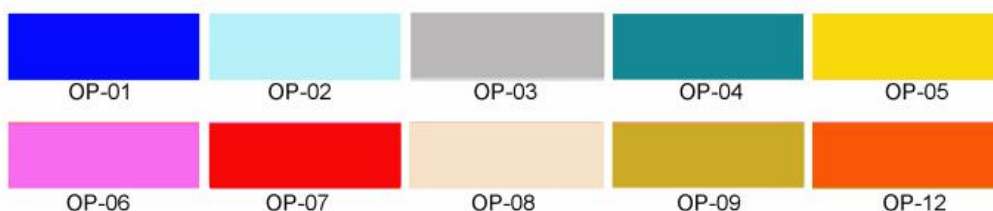

Inventory

We can provide customized thickness, width and length. But in order to make a fast delivery, we prepare the below thickness as our standard production.

Product	Specification	
High Clear EVA film	0.25mm, 0.38mm	Max 2400mm
Ultra Clear EVA film	0.25mm, 0.38mm, 0.50mm, 0.76mm, 1.52mm	Max 2600mm
White EVA film	0.38mm * 2000mm/2400mm *100m	
Color EVA film	0.38mm * 2000mm/2400mm *100m	

Packing and Delivery

Goods can be delivery by sea, regular air and also door to door express. Below is our packing images to sea and air delivery. For FCL loading, we will help to calculate the loading quantity.



Plywood case for Sea delivery
 MOQ: 8 rolls



Pallet for Air delivery
 MOQ: 1 or 2 rolls

